

# THE SILENCE SPEAKS FOR ITSELF



- ELIMINATES ALL NOISE BETWEEN THE BALL MOUNT AND RECEIVER TUBE.
- WORKS WITH ANY 2" HITCH RECEIVER. NO MODIFICATIONS NEEDED.
- QUAD LIFTER DESIGN PROVIDES ULTIMATE LOCKING POWER.
- QUICK AND EASY TO USE STAINLESS STEEL LEVER.
- MECHANISM CONSTRUCTED FROM STAINLESS STEEL AND ANODIZED ALUMINUM.
- POLYESTER BASED POWDER COATING FOR MAXIMUM PROTECTION.
- EXCEEDS SAE J684 AND VESC V5 STANDARDS.
- BALL MOUNT CONSTRUCTED OF ASTM A-500 AND ASTM A36 STRUCTURAL QUALITY STEELS.

## QUIET HITCH


TEL. 559.455.9475 FAX. 559.455.9625  
FRESNO, CALIFORNIA USA  
WWW.QUIETHITCH.COM



THE QUIET HITCH ANTI-RATTLE BALL MOUNT ELIMINATES THOSE ANNOYING NOISES FROM YOUR HITCH WHEN TOWING. THE QUIET HITCH IS ENGINEERED AROUND OUR PATENT PENDING QUAD LIFTER DESIGN TO MAKE IT THE MOST SECURE BALL MOUNT IN THE WORLD.

## How It Works


WHEN THE LEVER IS ROTATED TO THE UPRIGHT POSITION, FOUR LIFTERS EXTEND FROM WITHIN THE BALL MOUNT WALLS. THE FOUR LIFTERS THEN ENGAGE THE INNER WALLS OF YOUR RECEIVER HITCH, LOCKING THE BALL MOUNT IN PLACE STOPPING ALL MOVEMENT AND RELATED NOISE.

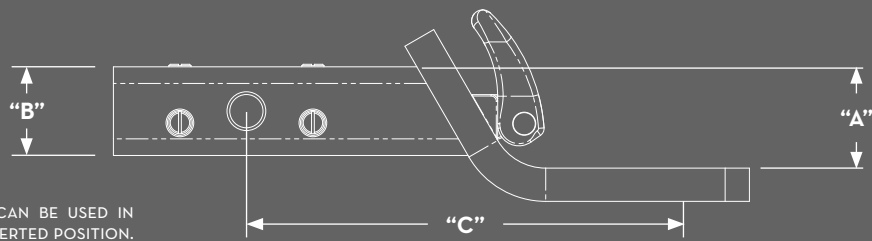

NOTE: THE BALL MOUNT CAN BE USED IN SHOWN POSITION OR AN INVERTED POSITION.


PART #	DROP "A"	SHANK SIZE "B"	RAITING	BALL HOLE	LENGTH "C"
2103	2"	2"	CLASS 4 10,000/1,500	1"	10"
2104	4"	2"	CLASS 4 10,000/1,500	1"	12"
2105	6"	2"	CLASS 4 10,000/1,500	1"	12"

## INSTRUCTIONS

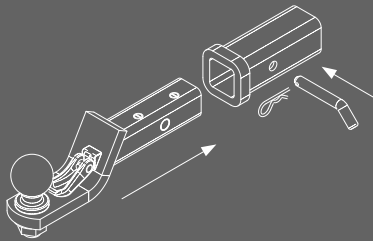

### STEP 1


Insert anti-rattle ball mount, with lever in the down position, into your hitch's receiver tube & secure with hitch pin.

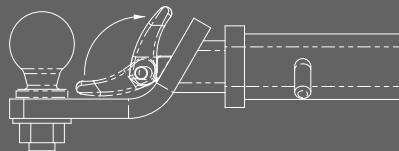

### STEP 2

Engage lever by rotating it upward and inward towards the receiver hitch.

NOTE: This device MUST be used with a receiver pin.



### STEP 3

Make necessary one-time adjustments to the adjustment screw. If there is movement between the ball mount and the receiver tube, rotate the adjustment screw clockwise until there is no more movement. If the lever is difficult to engage, rotate the adjustment screw counterclockwise until the lever can be engaged and disengaged by hand.